

Committed to Sustainability.

At DyStar, our products and services help customers worldwide reduce costs, shorten lead times and meet stringent quality and ecological specifications.




econfidence[®]
from DyStar[®]

DyStar[®]

Dianix[®] Dry Dyes

Water-free polyester dyeing with supercritical carbon dioxide

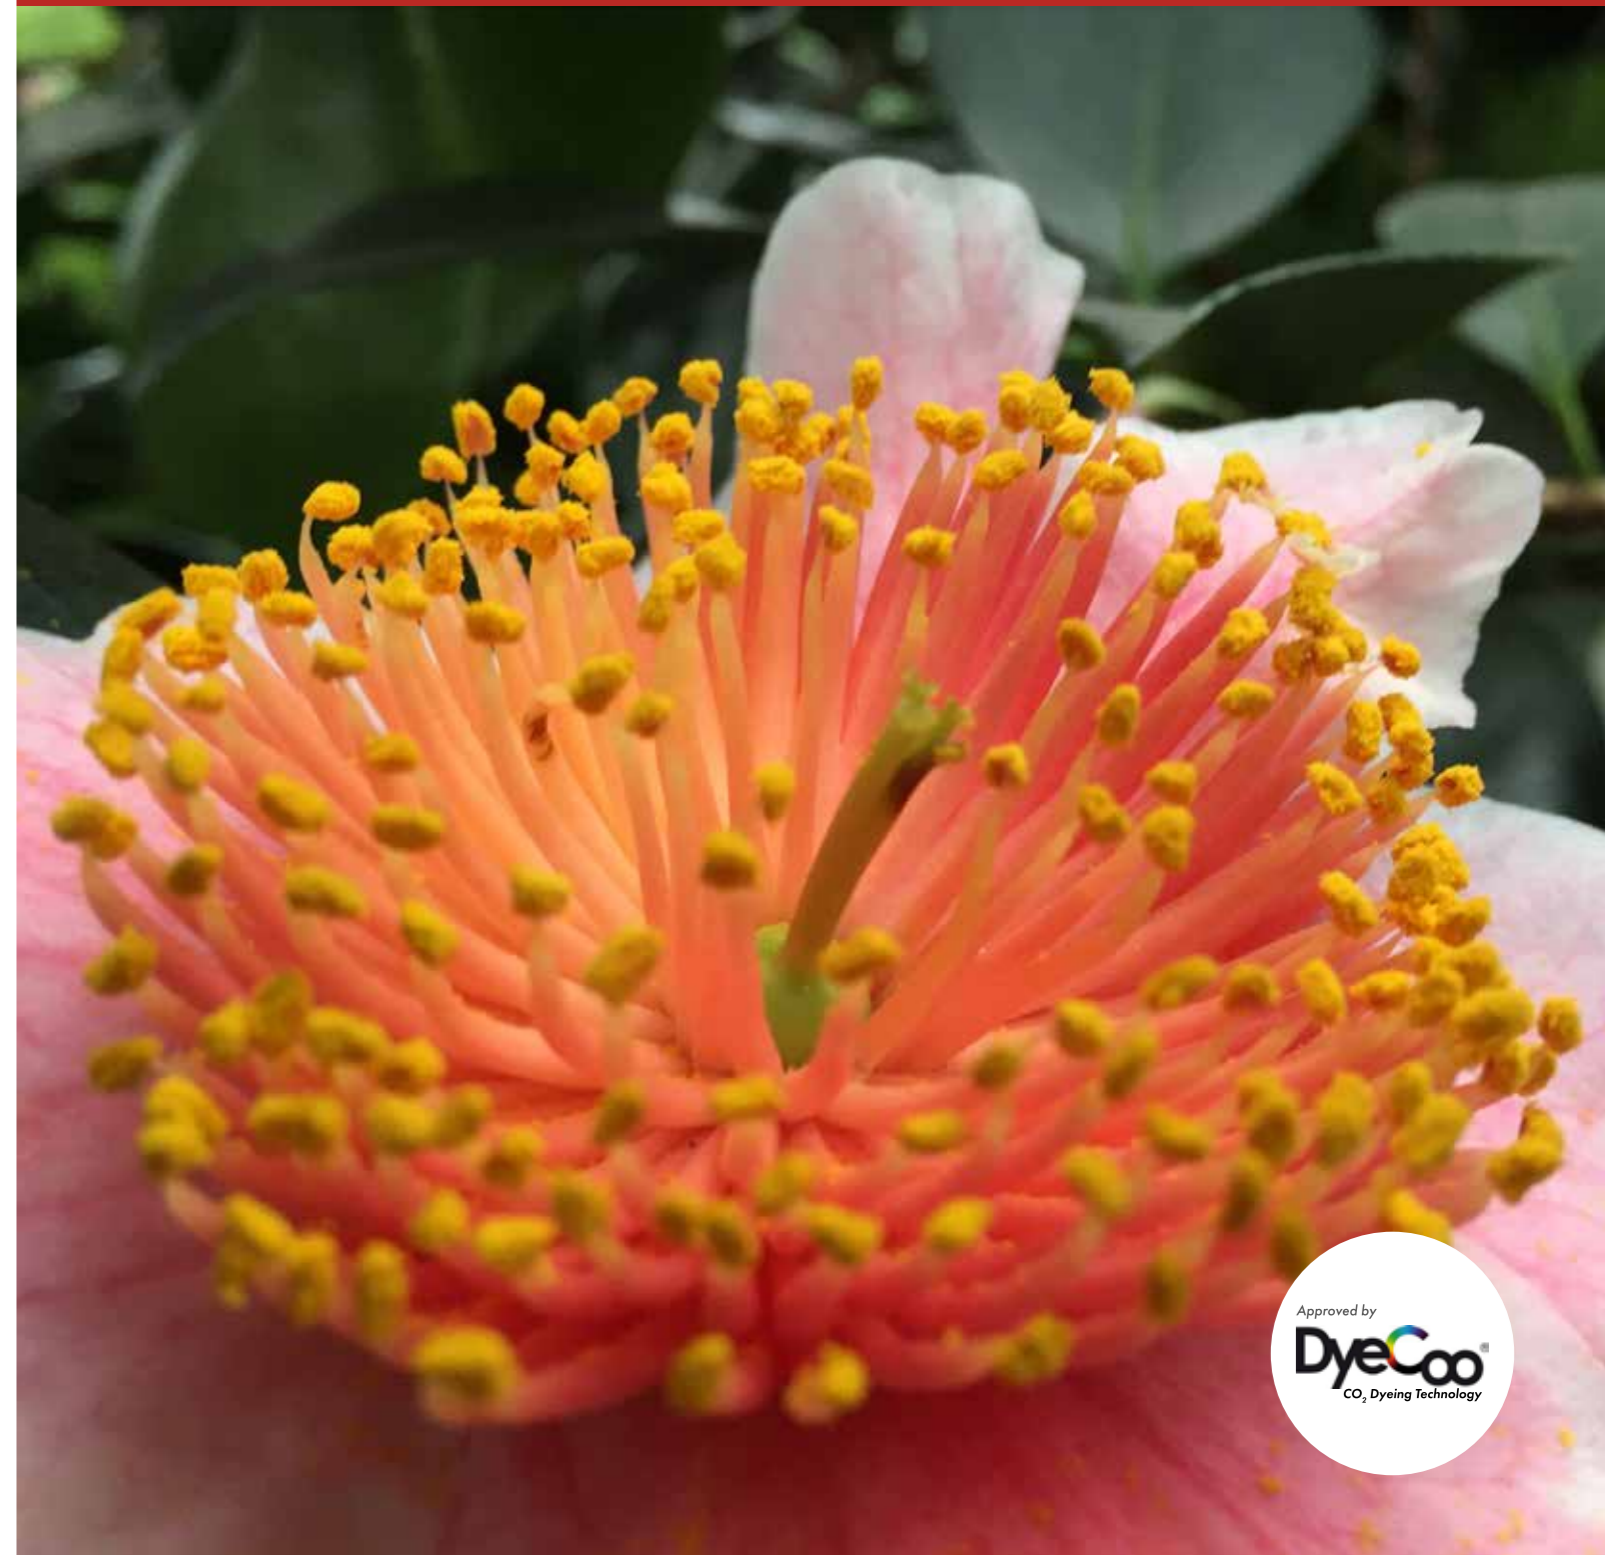

Information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

DyStar[®] econfidence[®]
and Dianix are registered trademarks of DyStar Colours Distribution GmbH
DyeCoo is a registered trademark of DyeCoo Textile Systems B.V.

Global Headquarters
DyStar Singapore Pte Ltd
Tel: +65 66 71 28 00 Fax: +65 66 59 13 28 DyStar.Singapore@DyStar.com
www.DyStar.com

DyStar[®]

071.0014.02.1902



Dyeing with supercritical carbon dioxide (CO₂ dyeing) is a water-free coloration method. The increasing worldwide demand for textiles which are produced with minimal impact on the environment led to commercialization of these dyeing method. Next to the machinery manufacturer, the introduction of CO₂ dyeing to the textile industry is driven and accelerated by retailers & brands.

Dye selection


The dissolving capacity of supercritical carbon dioxide corresponds to that of the less polar organic solvents. The suitability of disperse dyes for dyeing with supercritical CO₂ is depending on following parameters:

Solubility in CO₂ / Solubility speed / Saturation in CO₂ / Diffusion speed

Since impurities are unfavorable for the dyeing process with supercritical CO₂, purified disperse dyes have to be used.

Shade illustration of Dianix[®] Dry dyes on polyester knitted fabric (75D72F)


0.50% Dianix Dry Orange XF2



1.00% Dianix Dry Rubine XF2




1.00% Dianix Dry Blue XF2



1.00% Dianix Dry Green XF2



Dianix[®] Dry selection for highest levels of wet-fastness

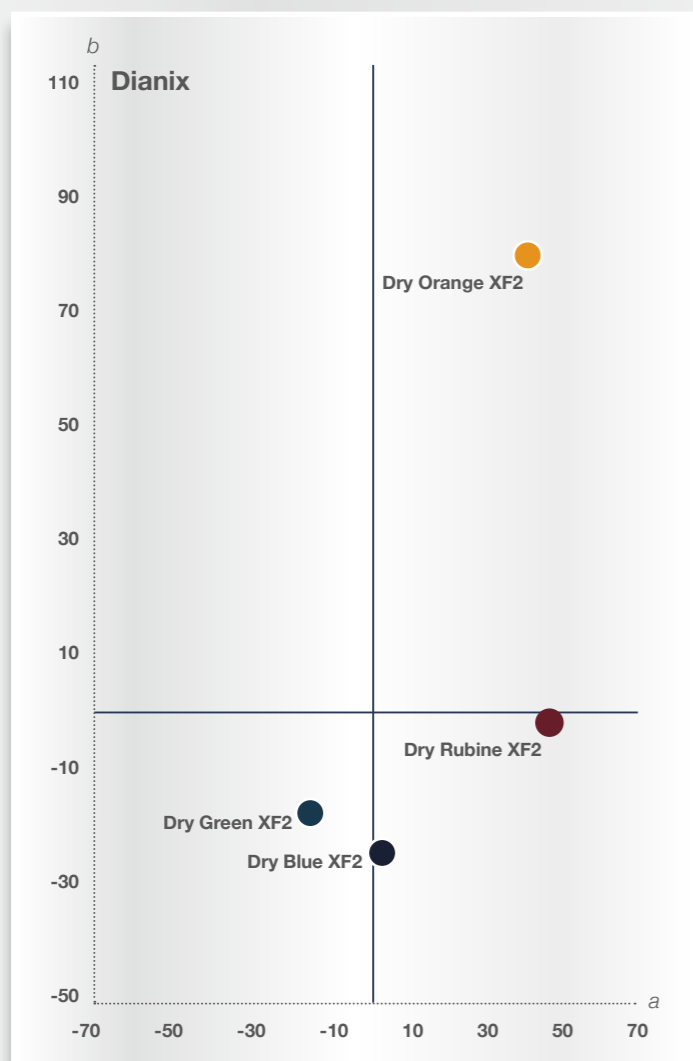

Fastness properties of Dianix Dry dyes on polyester knitted fabric (75D72F)

Dianix	%	Fastness to Washing Nike [®] 50°C PA/PES/CA	Fastness to Water PA/PES/CA	Fastness to Perspiration Acid PA/PES/CA	Fastness to Perspiration Alkaline PA/PES/CA	Fastness to Light Nike method
Dry Orange XF2	0.25	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	0.50	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
Dry Rubine XF2	0.50	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	3-4
	0.75	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.00	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.50	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
Dry Blue XF2	0.50	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	3-4
	0.75	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.00	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.50	4/4-5/4-5	4/4-5/4-5	4/4-5/4-5	4/4-5/4-5	4
Dry Green XF2	0.50	4-5/4-5/4-5	4/4-5/4-5	4/4-5/4-5	4/4-5/4-5	4
	0.75	4/4-5/4-5	4-5/4-5/4-5	4/4-5/4-5	4-5/4-5/4-5	3-4
	1.00	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.25	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	4
	1.50	3-4/4-5/4-5	4/4-5/4-5	4-5/4-5/4-5	4-5/4-5/4-5	3-4